


# Paving Brick Specifications

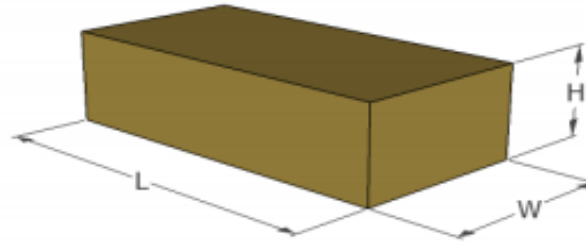

## Paving Brick - Dimensions, Weights and Coverage

Description	Width (W)		Height (H)		Length (L)		Weights		Unts/ft <sup>2</sup>		Packaging	
	in	mm	in	mm	in	mm	lbs	kg	Unts/ft <sup>2</sup>	Units/M <sup>2</sup>	Type	Qty
1-1/4 Split Modular Paver	3 5/8	92	1 1/4	32	7 5/8	194	2.3	1.0	4.5	48.4	Pallet	664
1-1/4 Split True Paver	4	102	1 1/4	32	8	203	2.7	1.2	4.5	48.4	Pallet	664
2-1/4 Modular Paver	3 5/8	92	2 1/4	57	7 5/8	194	4.2	1.9	4.5	48.4	Cube	500
2-1/4 True Paver	4	102	2 1/4	57	8	203	5.4	2.5	4.5	48.4	Cube	500
2-5/8 Vehicular Mod Paver	3 5/8	92	2 5/8	67	7 5/8	194	4.9	2.2	4.5	48.4	Cube	420
2-5/8 Vehicular True Paver	4	102	2 5/8	67	8	203	6.3	2.9	4.5	48.4	Cube	420

The Above Brick Manufactured by Interstate Brick comply with the following Specifications:

**ASTM C902:** Grade SX; Type I, II and III; Application PS, PX or PA as specified in Purchase Order

**CSA A82:** Grade SX; Type I, II and III; Application PS, PX or PA as specified in Purchase Order