


# Face Brick Specifications

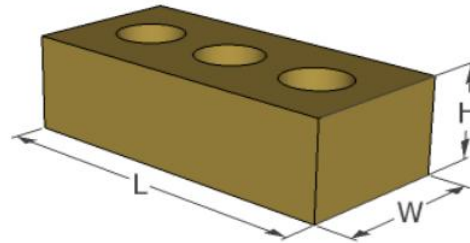

## Commercial / Residential Brick - Dimensions, Weights and Coverage

Description	Width (W)		Height (H)		Length (L)		Weights		Unts/ft <sup>2</sup>		Packaging	
	in	mm	in	mm	in	mm	lbs	kg	Unts/ft <sup>2</sup>	Units/M <sup>2</sup>	Type	Qty
King	3	76	2 5/8	67	9 5/8	244	4.7	2.1	4.80	51.7	Cube	424
2 1/4" Modular	3 5/8	92	2 1/4	57	7 5/8	194	3.8	1.7	6.86	73.8	Cube	500
2 3/4" Modular	3 5/8	92	2 3/4	70	7 5/8	194	5.1	2.3	5.60	60.3	Cube	380
4" Modular	3 9/16	90	3 9/16	90	7 9/16	192	6.1	2.8	4.50	48.4	Cube	305
8" Modular	3 9/16	90	7 9/16	192	7 9/16	192	12.5	5.7	2.25	24.2	Pallet	128
2 1/4" Norman	3 9/16	90	2 1/4	57	11 9/16	294	5.5	2.5	4.47	48.1	Cube	300
4" Norman	3 9/16	90	3 9/16	90	11 9/16	294	8.7	4.0	3.00	32.3	Cube	183
2 1/4" Emperor	3 9/16	90	2 1/4	57	15 9/16	395	8.9	4.0	2.76	29.7	Pallet	240
4" Emperor	3 9/16	90	3 9/16	90	15 9/16	395	11.5	5.2	2.25	24.2	Pallet	160
8" Emperor	3 9/16	90	7 9/16	192	15 9/16	395	23.0	10.5	1.13	12.1	Pallet	64

The Above Brick Manufactured by Interstate Brick comply with the following Specifications:

**ASTM C216:** Grade SW; Type FBA, FBS or FBX as specified in Purchase Order

**CSA A82:** Grade EG; Type FBA, FBS or FBX as specified in Purchase Order